

## NVE Series


## IPC Module

1 CH D1 IP Camera Module (MPEG-4)



- 1 ch MPEG-4 D1 IP Camera Module
- 1 ch Audio Input, 1 ch Audio Output
- Transmitting Video Stream up to 25/30 FPS@D1
- Video Compression : MPEG-4, MPEG-2, MJPEG
- Deinterlacing in Hardware Encoding Engine
- Audio Compression : G.711
- RS-232C, RS-485 Support
- Motion Detection
- Text OSD
- Unicast / Multicast
- Providing only SDK, not Complete Application Software

## Dimension

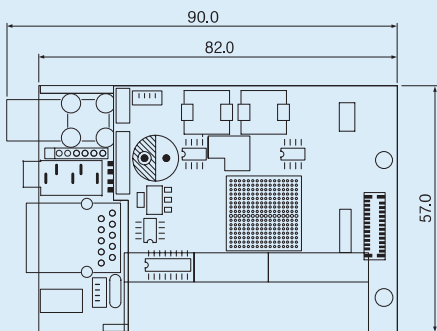

(Unit : mm)

## Specifications

## Network

Video	
<b>Input</b>	CVBS, CCIR656
<b>Output</b>	1 Loop Out
<b>Compression</b>	MPEG-4, MPEG-2, MJPEG Selectable
<b>Resolution</b>	D1, 2CIF, CIF, QCIF
<b>Compression FPS</b>	25/30 fps@D1
Audio	
<b>Input</b>	1 ch
<b>Output</b>	1 ch
<b>Compression</b>	G.711
Function	
<b>Network</b>	10 / 100 Base-T
<b>Digital Input / Output</b>	1 / 1 ch
<b>RS-485 / 422</b>	Support
<b>RS-232C</b>	Support
<b>Power over Ethernet</b>	Optional
<b>Deinterlacing</b>	Support (Hardware Encoding Engine)
<b>Motion Detection</b>	Support
<b>Text OSD</b>	Support (Inserted before Compression)
<b>Video Stream Encryption</b>	AES
<b>Protocol</b>	SNTP, DHCP, UDP, TCP, RTP, RTSP (Unicast, Multicast)
<b>Power Consumption</b>	<b>+12 V</b> 263 mA
<b>Temperature</b>	0 ~ 60 (32 °F ~ 140 °F)
<b>Humidity</b>	Up to 85% RH
<b>Dimension</b>	90(W) x 57(H) mm
<b>Weight</b>	68 g